

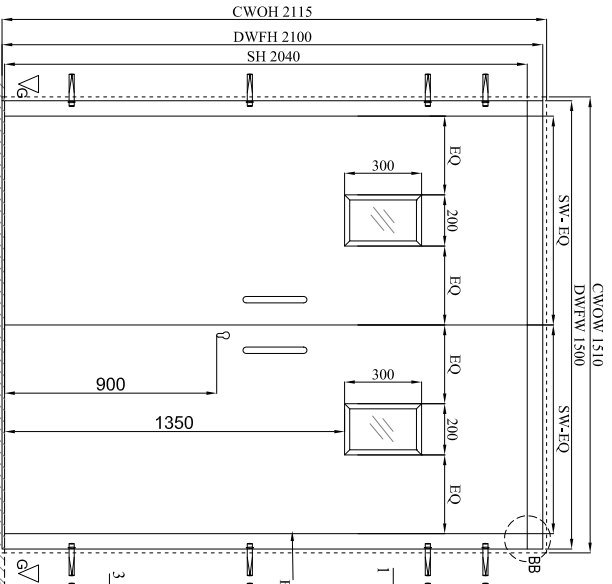
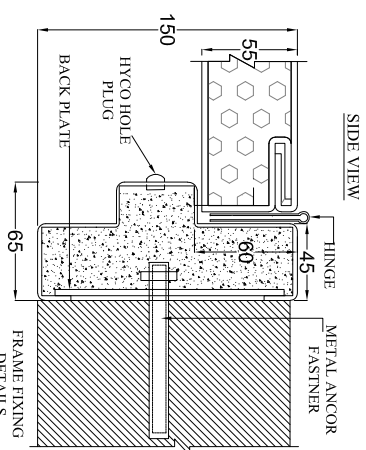
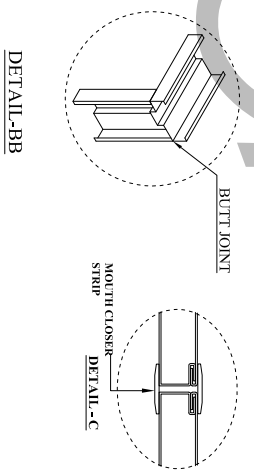
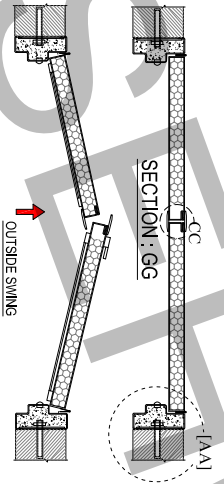


PUSH SIDE ELEVATION

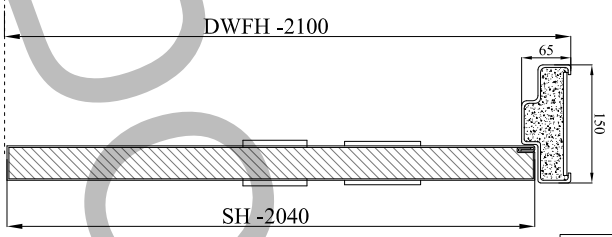

PULL SIDE ELEVATION

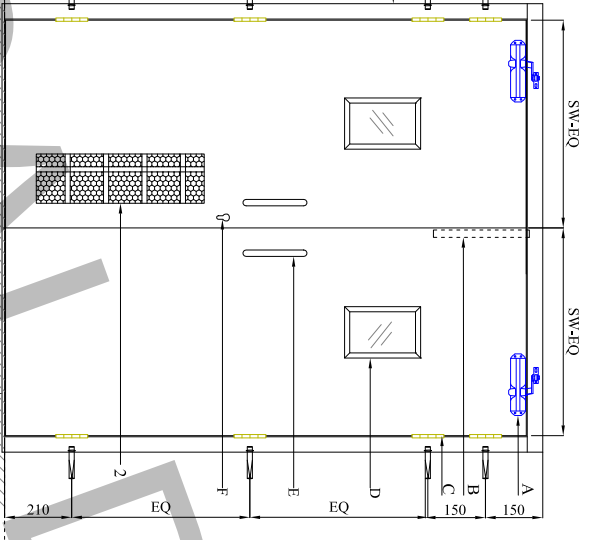

QTY. :-nos
 SIZE:- 1500X2100mm
2 Hrs FIRE RATED

MATERIAL DETAIL:-	
DOOR FRAME SHEET THICK	1.6 MM G.I SHEET
STIFFNER SHEET THICK	1.2 MM G.I SHEET
SHUTTER SHEET THICK	1.2 MM G.I SHEET
INSULATION	CERAMIC
FINISH	POWDER COATED

PROFILE DETAIL	
1. DOOR FRAME	150mmX65mm
2. INTERNAL STRUCTURE OF DOOR SHUTTER	55mmTHICK
3. PROVISION FOR METAL ANCHOR FASTNER	09nos
4. TIE BAR	1

HARDWARE DETAIL:-			
S. NO.	NAME	BRAND	QTY
A	SURFACE MOUNTED DOOR CLOSER	DAUERHAFT	2
B	CONCEALED TOWER BOLT 300mm LONG	DAUERHAFT	1
C	SS BALL BEARING HINGES(4"x3"x3mm)	DAUERHAFT	8
D	VISION PANEL 6mm THICK	WIRED	2
E	D- TYPE HANDLE	DAUERHAFT	2
F	MORTISE/DEAD LOCK WITH 80mm CYLINDER	DAUERHAFT	1

NOTE:-

1. CWOH - CLEAR WALL OPENING WIDTH
2. DWFH - DOOR WITH FRAME WIDTH
3. SW - SHUTTER WIDTH
4. CWOH - CLEAR WALL OPENING HEIGHT
5. DWFH - DOOR WITH FRAME HEIGHT
6. SH - SHUTTER HEIGHT
7. ST - SHUTTER THICK.



PROJECT:-	LOCATION:-	
CHECKED BY :- JITENDRA	APPROVED BY :- NEERAJ SEHGAL	
SIGNED :-	SIGNED :-	
APPROVAL BY CLIENT:-	APPROVAL BY CLIENT:-	
SIGNED :-	SIGNED :-	
Dwg No.	REV.	Tolerance
		±.5mm
Drawn :- ARMAN	Date :- 30-05-2020	Scale
		NTS
Title :- METAL FIRE DOOR	Units: Millimeter	
1500X2100		